

PUBLICATION NUMBER : 01065040  
PUBLICATION DATE : 10-03-89


APPLICATION DATE : 04-09-87  
APPLICATION NUMBER : 62220376

APPLICANT : SUMITOMO ELECTRIC IND LTD;

INVENTOR : SAITO MASAHIDE;

INT.CL. : C03B 37/018 // G02B 6/00

TITLE : PRODUCTION OF POROUS OPTICAL FIBER PREFORM

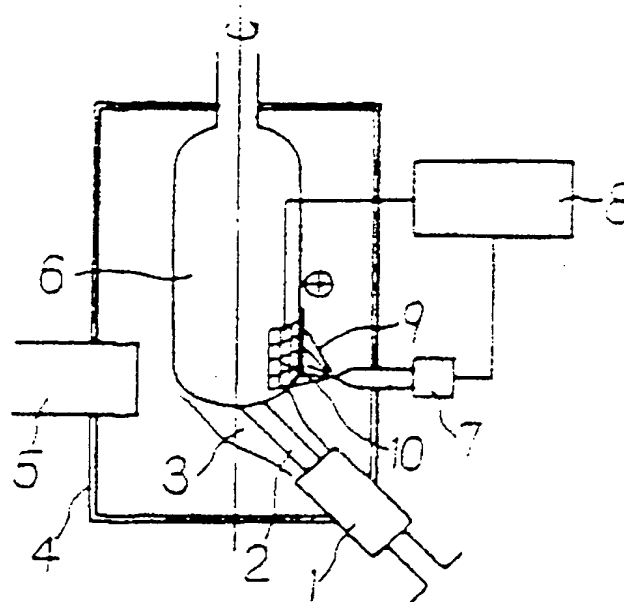

ABSTRACT : PURPOSE: To efficiently obtain the title preform without cracking by cooling a porous preform with an ion jet generated by a corona discharge, and simultaneously depositing fine glass particles on the preform at the time of producing the porous optical fiber preform by the axis formation in a vapor phase.

CONSTITUTION: A corona-discharge electrode 7 is arranged above a fine glass particle synthesizing burner 1. A glass material and a combustion gas are supplied to the burner 1 to cause a flame hydrolysis reaction, the formed fine glass particles 3 are deposited on the surface of a starting material, and a porous optical fiber preform 6 is obtained. A negative voltage is simultaneously impressed on the corona-discharge electrode 7 and a positive voltage on a wire-mesh electrode 10 from a DC power source 8 to generate a corona discharge between both electrodes, and an ion jet 9 is produced. The porous preform 6 is cooled by the ion jet 9, the fine glass particles are simultaneously deposited, and the preform 6 is produced.

COPYRIGHT: (C) JPO